


REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
	新訂圖面	—	07/05/2014	彭志婷

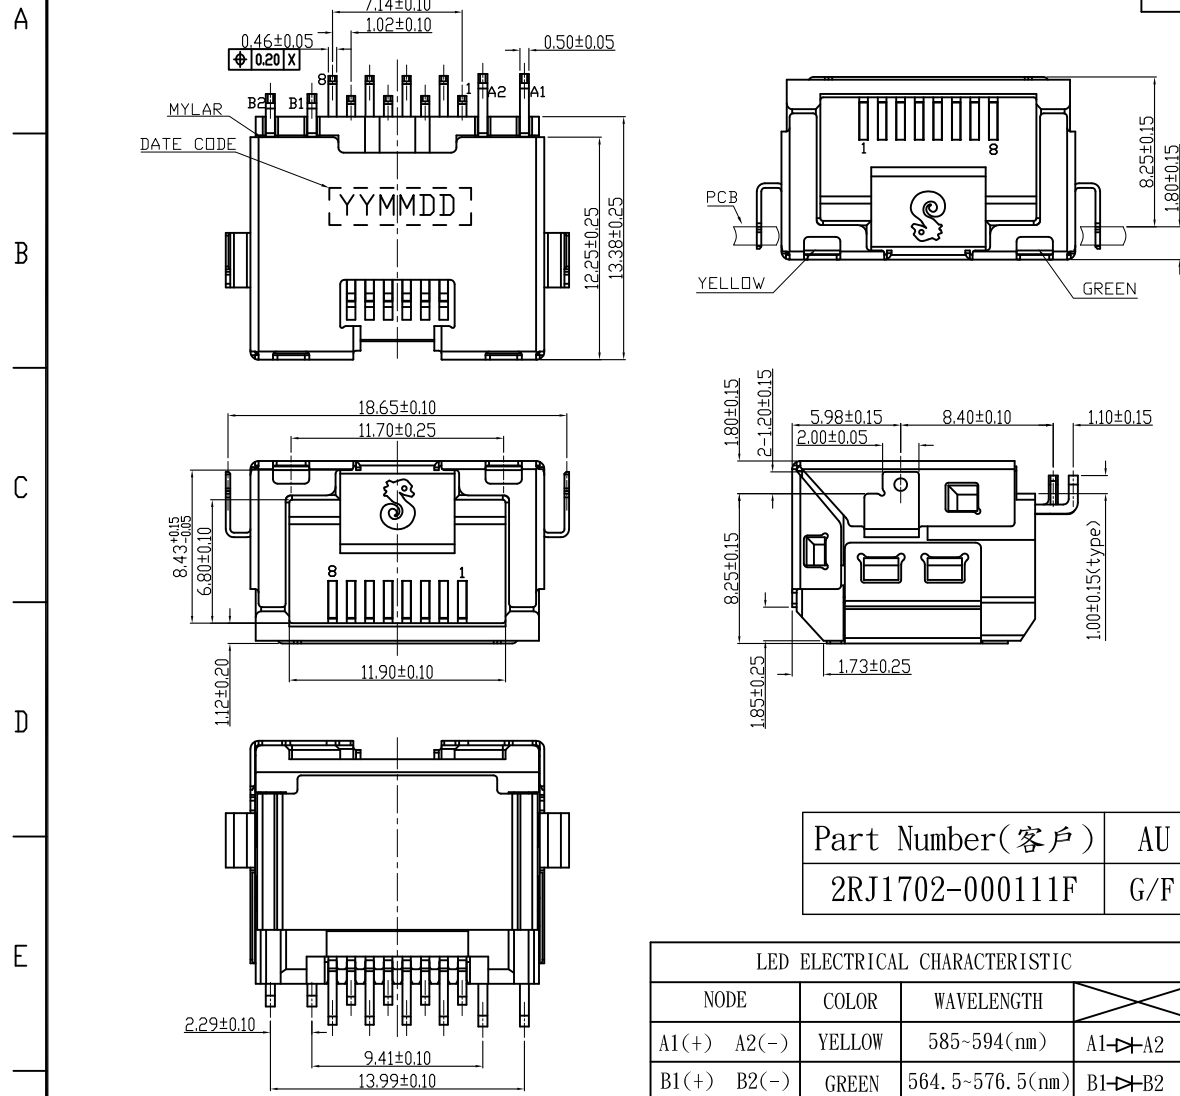

Part Number(客戶)	AU
2RJ1702-000111F	G/F

LED ELECTRICAL CHARACTERISTIC				
NODE	COLOR	WAVELENGTH		
A1(+) A2(-)	YELLOW	585~594(nm)	A1	A2
B1(+) B2(-)	GREEN	564.5~576.5(nm)	B1	B2

NOTES:
1.MATERIAL:
1-1:HOUSING:PA10T+30%GF(VICNGL R630NH);UL 94V-0
COLOR:BLACK.
1-2:TERMINAL:PHOSPHOR BRONZE(C5210R-EH);T=0.30mm
TREATMENT:GOLD FLASH ON CONTACT AREA,
MATTE SN 80u" MIN ON SOLDER TAIL,ALL OVER NI 30u" MIN.
1-3:SHELL:SUS(201);T=0.25mm,TREATMENT:ALL OVER WHITE NI 50u" MIN.
1-4:BOTTOM SHELL:SUS(201);T=0.15mm,TREATMENT:ALL OVER WHITE NI 50u" MIN.
1-5:LED:YELLOW/GREEN,TREATMENT:SILVER.
1-6:MYLAR:THERMOPLASTIC,COLOR:YELLOW.
2.ELECTRICAL CHARACTERISTICS:
2-1.CURRENT RATING:1.5A MAX.
2-2.VOLTAGE RATING:150V MAX.
2-3.INSULATION RESISTANCE:1000MΩ MIN.
2-4.DIELECTRIC WITHSTANDING VOLTAGE:
500V CONTACT TO CONTACT.
3.MECHANICAL CHARACTERISTICS:
3-1.MATING FORCE:2.3kgf MAX.
3-2.UNMATING FORCES:4.0kgf MIN.
3-3.OPERATING TEMPERATURE:-30*TO +70*.
3-4.FOR REFLOW SOLDERING LEAD-FREE PROCESS.
3-5.MATES WITH MODULAR PLUG CONFORMING TO FCC
PART 68,SUBPART F.

東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
地址:東莞市塘廈鎮諸佛嶺178工業區
TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY	彭志婷	ITEM	MINI RJ45 PHONE JACK(反向8.25mm)	ANGLE PROJECTION	UNIT	mm
CHECKED BY		PART NO	CD4531022020		SCALE	1:1
APPROVED BY				.X±0.20 .XX±0.10	DATE	07/05/2014