


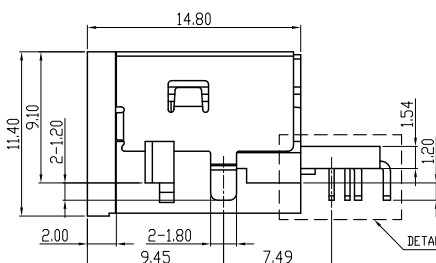
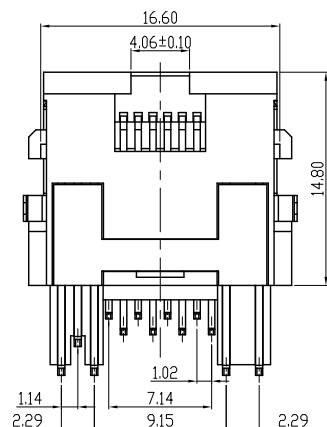
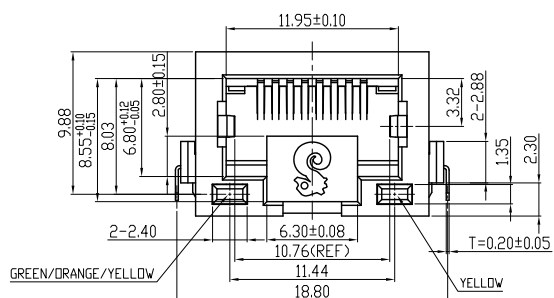
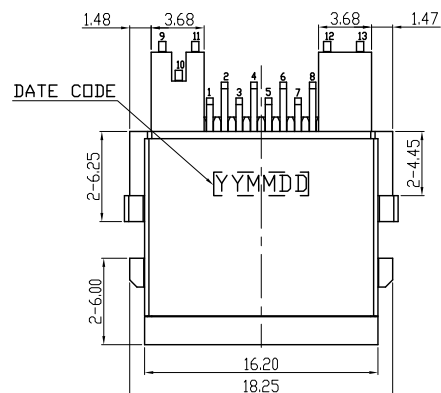


REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
A	新訂圖面	—	12/24/2013	彭志婷

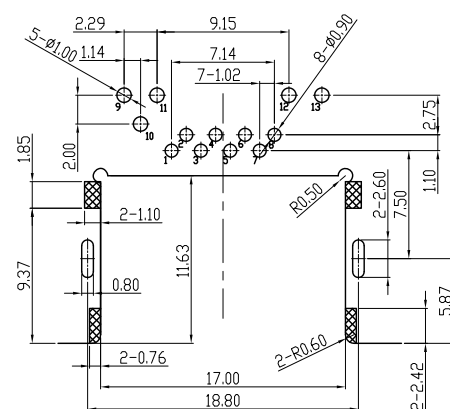

DETAIL B
SCALE 2:1



NOTES:

- 1-MATERIAL:
1-1-HOUSING: PA9T, UL 94V-0, COLOR: BLACK
1-2-TERMINAL: PHOSPHOR BRONZE; T=0.35mm
TREATMENT: 50u" Au/50u" MATTE TIN; MIN 30u" MIN
1-3-SHELL: SUS; T=0.20mm, TREATMENT: 50u" NI
1-4-LED: GREEN/ORANGE/YELLOW, TREATMENT: 40u" SILVER
- 2-SPECIFICATIONS:
2-1-VOLTAGE RATING: 150VAC MAX.
2-2-CURRENT RATING: 1.5AMP MAX.
2-3-INSULATION RESISTANCE: 500MΩ MIN. AT 500V DC.
2-4-DIELECTRIC WITHSTANDING VOLTAGE:
500V AC 60HZ 1MINUTE.
2-5-DURABILITY: 5000 CYCLES.
2-6-OPERATING TEMPERATURE: -30°C TO +70°C.
2-7-FOR REFLOW SOLDERING LEAD-FREE PROCESS.
2-8-MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

Part Number(客戶)	AU
2RJ1662-010111F	5u"

TABLE:

30μ"	CD4531022011	-02	WHITE NI	YES
5μ"	CD4531022011	-01	WHITE NI	YES
AU PLATING	PART NUMBER	-XX	SHELL PLATING	HF

LED ELECTRICAL CHARACTERISTIC			
NODE	COLOR	WAVELENGTH	
9(-) 10(+)	ORANGE	600-612nm	
11(-) 10(+)	GREEN	564-577nm	
9(-) 10(+)	YELLOW	589-599nm	
11(-) 10(+)	YELLOW	589-599nm	
12(+) 13(-)	YELLOW	589-599nm	


東莞世華電子有限公司
 SHYH HWA ELECTRONICS CO., LTD. (DONGGUAN)
 地址: 東莞市塘廈鎮諸佛嶺178工業區
 TEL: 0769-87910020-1 FAX: 0769-87910210

DRAWN BY	彭志婷	ITEM	RJ45 PHONE JACK 無彈片(板上9.10mm)	ANGLE PROJECTION	UNIT	mm
CHECKED BY		PART NO	CD4531022011-XX	SCALE	1:1	
APPROVED BY				TOLERANCE	.X±0.30 .XX±0.20	DATE
						12/24/2013