
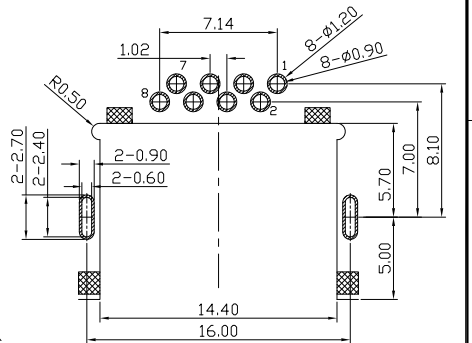








**RoHS Compliant**

**Halogen Free**

REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
△	新訂圖面	—	10/17/2016	鐘 杭

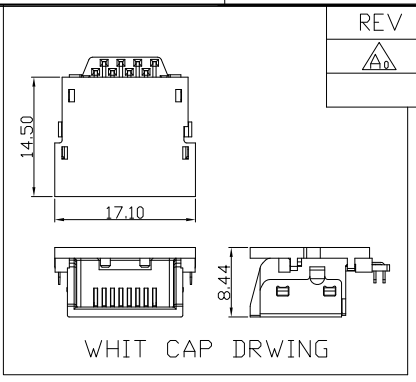

NOTES:  
 1.MATERIAL:  
 1-1:HOUSING:PA4T(TX1)/PA10T+35%GF(VICNYL R635NH);JUL 94V-0, COLOR:BLACK  
 1-2:TERMINAL:PHOSPHOR BRONZE(C5210R-EH);T=0.25mm  
 TREATMENT:  
 1.GOLD FLASH ON CONTACT AREA,MATTE SN 50u" MIN ON SOLDER TAIL,ALL OVER NI 50u" MIN.  
 2.GOLD 30u" MIN ON CONTACT AREA,MATTE SN 50u" MIN ON SOLDER TAIL,ALL OVER NI 50u" MIN.  
 1-3:SHELL:SUS(201);T=0.20mm,TREATMENT:50u" NI  
 1-4:DEFEND:LCP(E6808);JUL 94V-0, COLOR:BLACK  
 1-5:CAP(2X):LCP(E6808);JUL 94V-0, COLOR:BLACK  
 2.SPECIFICATIONS:  
 2-1.VOLTAGE RATING:150VAC MAX.  
 2-2.CURRENT RATING:1.5AMP MAX.  
 2-3.INSULATION RESISTANCE:1000MΩ MIN. AT 500V DC.  
 2-4.DIELECTRIC WITHSTANDING VOLTAGE:500V AC 60HZ 1MINUTE.  
 2-5.DURABILITY:5000 CYCLES.  
 2-6.OPERATING TEMPERATURE:-30°C TO+70°C.  
 2-7.FOR REFLOW SOLDERING LEAD-FREE PROCESS.

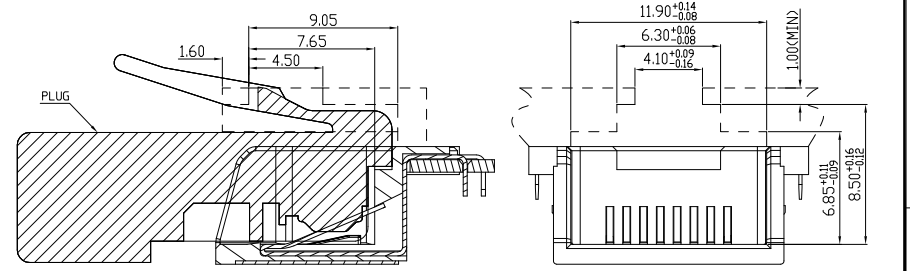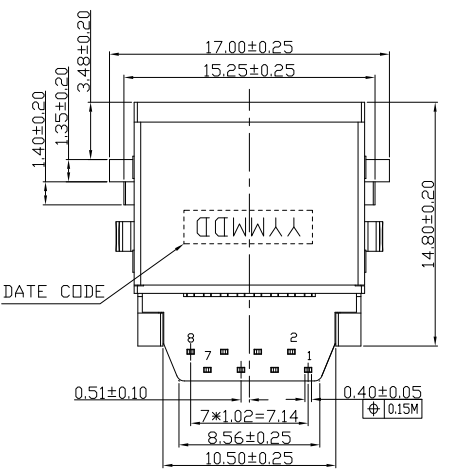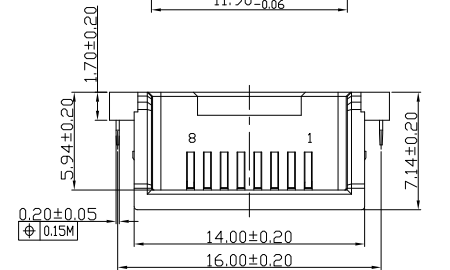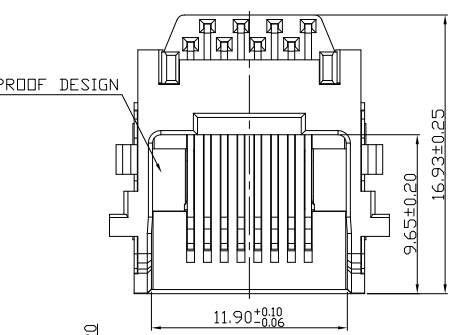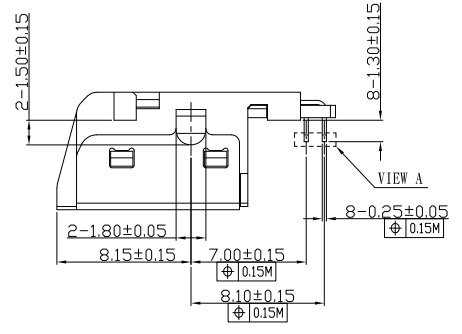

Part Number(客戶)	AU
2RJ1755-001111F	G/F
2RJ1755-001211F	30u"

**東莞世華電子有限公司**  
 SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)  
 地址:東莞市塘廈鎮諸佛嶺178工業區  
 TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY	鐘 杭	ITEM	半截式 RJ45 PHONE JACK(板上1.70mm)
CHECKED BY			(H=7.14mm)
APPROVED BY		PART NO	CD4531052004-XX

ANGLE PROJECTION	UNIT	mm
	SCALE	1:1
TOLERANCE	DATE	
.X±0.20 .XX±0.10		