

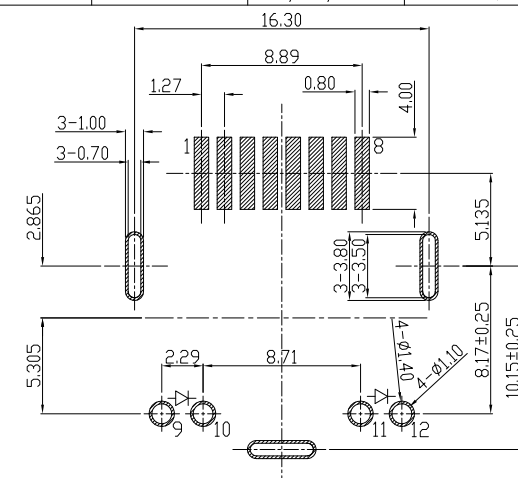

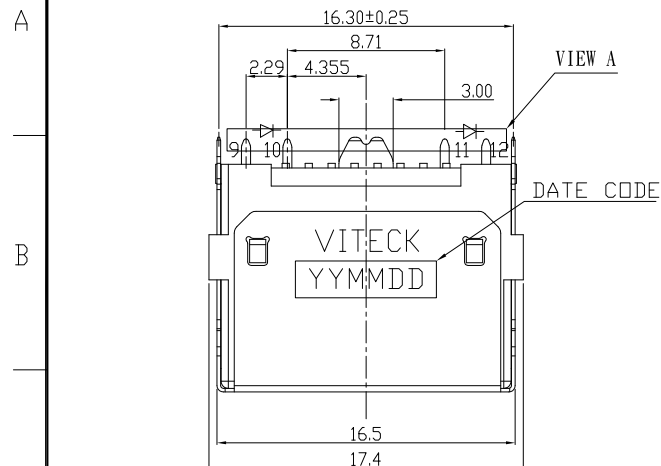


REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
	新訂圖面	—	12/17/2015	胡久量
	修改麥拉片規格	ECR	03/27/2018	鐘 杭
	修改麥拉片規格	ECR	08/10/2018	左勝勝
	工程變更,取消麥拉	ECN	02/22/2019	左勝勝

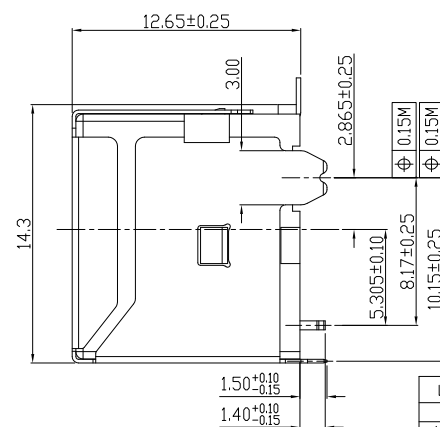

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm
RECOMMENDED PCB THICKNESS:1.60±0.05

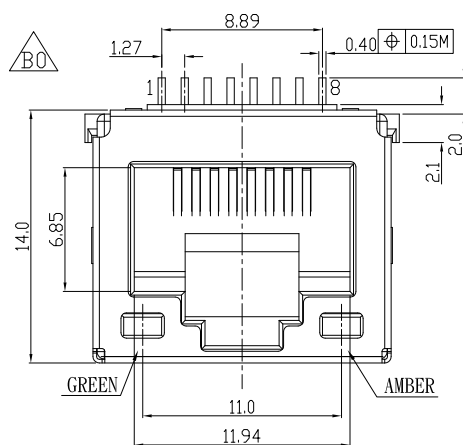

Part Number(凡準)	AU
RJN-021-1L12HG	G/F
RJN-021-1L12H6	30u"

LED ELECTRICAL CHARACTERISTIC				
NODE		COLOR		FORWARD CURRENT
9(+)	10(-)	AMBER	9  10	If=20mA
11(+)	12(-)	GREEN	11  12	If=20mA

TABLE:

30μ"	CD4521052004	-02	WHITE	NI	YES
G/F	CD4521052004	-01	WHITE	NI	YES
AU PLATING	PART NUMBER	-XX	SHELL PLATING	HF	

NOTES:

- 1-MATERIAL:
1-1:HOUSING:PA10T+35%GF(VICNYL R635NH)/PA4T;UL 94V-0, COLOR:BLACK
1-2:TERMINAL:PHOSPHOR BRONZE(C5210R-EH);T=0.25mm TREATMENT:
1.GOLD FLASH ON CONTACT AREA,MATTE SN 80u" MIN
ON SOLDER TAIL,ALL OVER NI 30u" MIN.
2.GOLD 30u" MIN ON CONTACT AREA,MATTE SN 80u" MIN
ON SOLDER TAIL,ALL OVER NI 30u" MIN.
- 1-3:SHELL:SUS(201);T=0.20mm,TREATMENT:50u" NI
- 1-4:LED:GREEN/AMBER,TREATMENT:SILVER
- 2-SPECIFICATIONS:
2-1.VOLTAGE RATING:150VAC MAX.
2-2.CURRENT RATING:15AMP MAX.
2-3.INSULATION RESISTANCE:500MΩ MIN. AT 500V DC.
2-4.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC 60HZ 1MINUTE.
2-5.DURABILITY:5000 CYCLES.
2-6.OPERATING TEMPERATURE:-30°C TO+70°C.
2-7.FOR REFLOW SOLDERING LEAD-FREE PROCESS.



東莞世華電子有限公司

SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)

地址:東莞市塘廈鎮諸佛嶺178工業區

TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY	左勝勝	ITEM	
CHECKED BY		PART NO	
APPROVED BY			

RJ45 PHONE JACK(H=12.65)452專用
(SMT腳長1.50mm)

CD4521052004

ANGLE PROJECTION	UNIT	mm
	SCALE	1:1
TOLERANCE	DATE	02/22/2019