

**RoHS
Compliant**

Halogen Free

REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
	新訂圖面	—	04/08/2016	鐘航

A





B

C




D

E

F

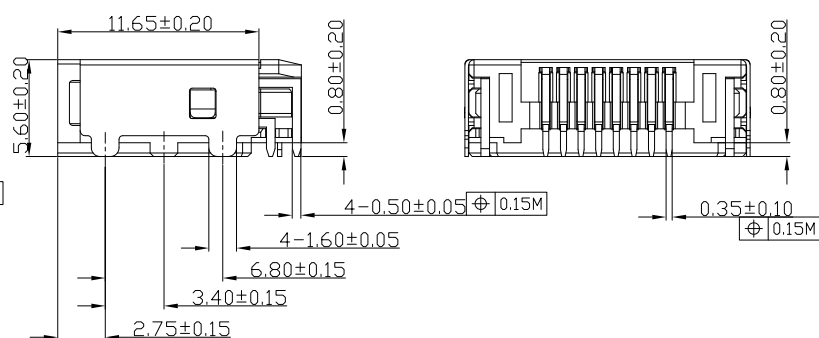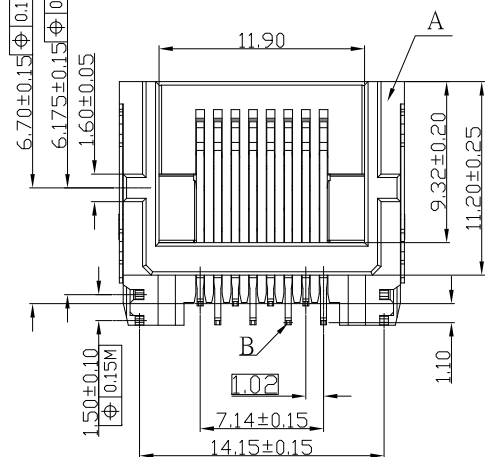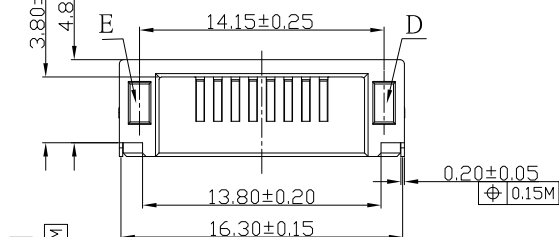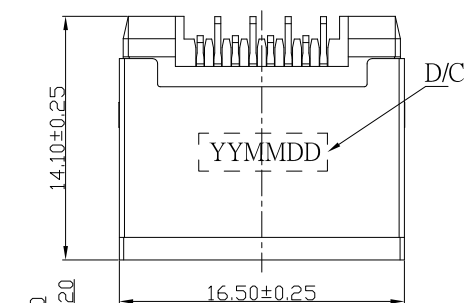

Part Number(信音)		AU
2RJ1748-000111F		30u"
NODE	COLOR	
A1(+)-A2(-)	GREEN	A1-→A2
B1(+)-B2(-)	AMBER	B1-→B2

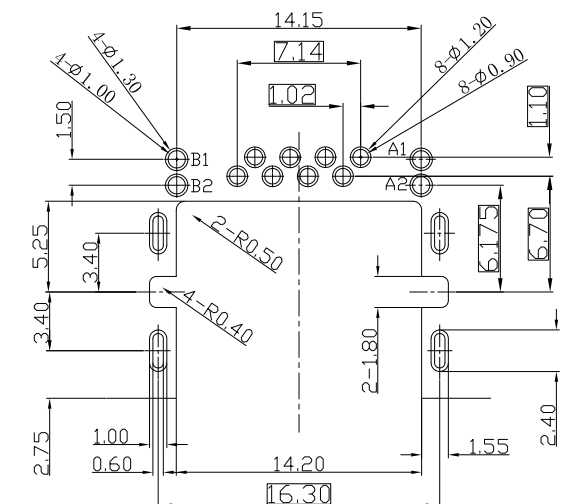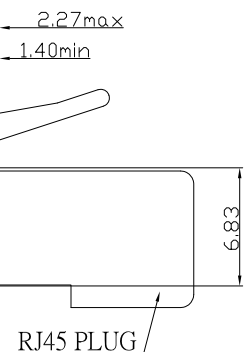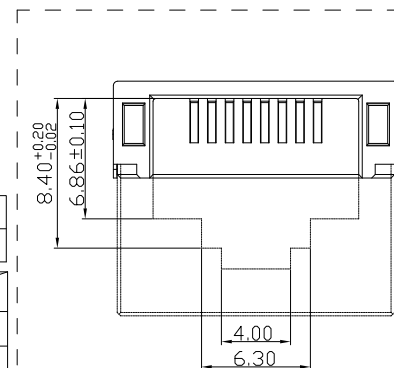

RECOMMENDED PCB LAYOUT
TOP VIEW: TOL:±0.05mm
PCB THICKNESS:1.00±0.05

- NOTES:
1.MATERIAL:
1-1:HOUSING:PA4T+35%GF(VICNYL R635NH);UL 94V-0, COLOR:BLACK
1-2:TERMINAL:PHOSPHOR BRONZE(C5210R-EH);T=0.25mm
TREATMENT:
1.GOLD FLASH ON CONTACT AREA,MATTE SN 50u" MIN
ON SOLDER TAIL,ALL OVER NI 30u" MIN.
2.GOLD 30u" MIN ON CONTACT AREA,MATTE SN 50u" MIN
ON SOLDER TAIL,ALL OVER NI 30u" MIN.
1-3:SHELL:SUS(201);T=0.20mm,TREATMENT:50u" NI
1-4:LED:AMBER/GREEN,TREATMENT:TIN
1-5:DEFEND:LCP(E6808);UL 94V-0, COLOR:BLACK
2.SPECIFICATIONS:
2-1.VOLTAGE RATING:150VAC MAX.
2-2.CURRENT RATING:1.5AMP MAX.
2-3.INSULATION RESISTANCE:500MΩ MIN. AT 500V DC.
2-4.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC 60HZ 1MINUTE.
2-5.DURABILITY:5000 CYCLES.
2-6.OPERATING TEMPERATURE:-30°C TO+70°C.
2-7.FOR REFLOW SOLDERING LEAD-FREE PROCESS.




東莞世華電子有限公司

地址:東莞市塘廈鎮諸佛嶺178工業區
TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY	鐘航	ITEM
CHECKED BY		
APPROVED BY		PART NO

半截式RJ45 PHONE JACK(板上4.8mm)

CD4531042011-XX

ANGLE PROJECTION	UNIT	mm
	SCALE	1:1
TOLERANCE	DATE	
.X±0.25 .XX±0.20		

A

B

C

D

E

F