

1 2 3 4 5 6 7 8

A

B

C

D

E

F

A


B

C

D

E


F

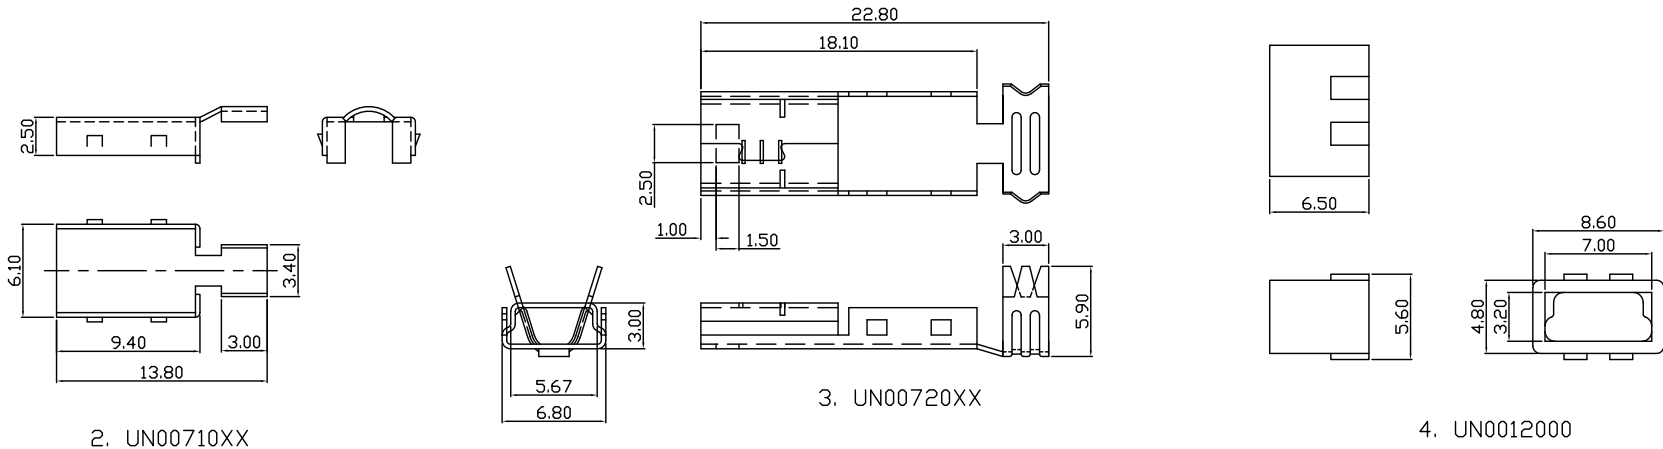

2. UN00710XX

3. UN00720XX

4. UN0012000

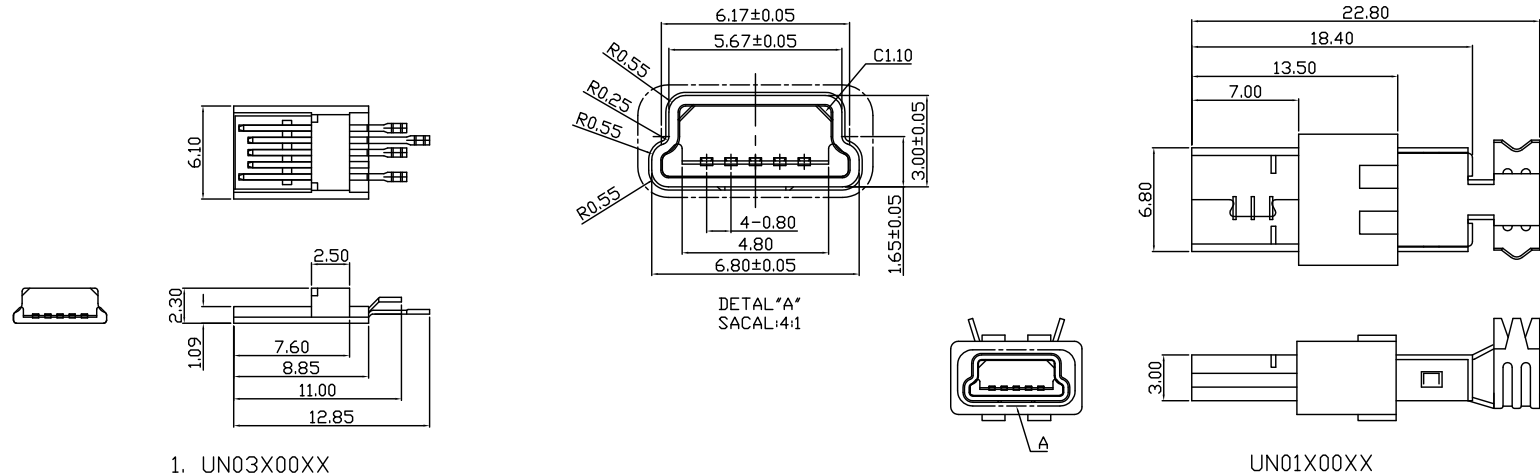

1. UN03X00XX

UN01X00XX

項次	名稱	材質	電鍍或顏色	數量	備註
1	單件式	5P MINI USB-B 公頭-PIN	磷銅(H), T=0.25±0.03MM	5	
		5P MINI USB-B 公頭-膠心	PBT+30%GF, UL 94 V-0.	1	
2	5P MINI USB-B 公頭-本体上蓋	SPCC, T=0.30±0.03MM	TIN PLATED OR NICKEL PLATED.	1	
3	5P MINI USB-B 公頭-本体下蓋	SPCC, T=0.30±0.03MM	TIN PLATED OR NICKEL PLATED.	1	
4	5P MINI USB-B 公頭-塑膠后套	PBT+15%GF, UL 94 V-0.	SEE TABLE2	1	

ELECTRICAL CHARACTERISTICS:  
 RATINGS:DC 30V MAX or AC 40V MAX,3A  
 INSULATION RESISTANCE:  
 1000MΩ MIN  
 CONTACT RESISTANCE:30mΩ MAX  
 DIELECTRIC STRENGTH:  
 250V AC/1 MINUTE  
 INSERTION FORCE:3.57kgf MAX.  
 WITHDRAWAL FORCE:0.30-1.02kgf.

TABLE1:

XX	PLATING
11	G.F./TIN PLATED
12	3u"G./TIN PLATED
13	5u"G./TIN PLATED
14	10u"G./TIN PLATED
15	15u"G./TIN PLATED
16	20u"G./TIN PLATED
17	30u"G./TIN PLATED
18	50u"G./TIN PLATED
20	30u"G./G.F. PLATED

TABLE2:

X	COLOR
0	白
1	黑
2	米

 東莞世華電子有限公司 SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN) 地址:東莞市塘廈鎮諸佛嶺178工業區 TEL:0769-7910020-1 FAX:0769-7910210	DRAWN BY		ITEM	5P MINI USB-B 公頭		ANGLE PROJECTION	UNIT	MM			
	CHECKED BY			PART NO	UN01X00XX	TOLERANCE	SCALE	2:1	圖面修正, 舊圖作廢	03/07/2003	
	APPROVED BY				X.XX±0.20	DATE	03/07/2003	REVISION	DESCRIPTION	DATE	

1 2 3 4 5 6 7 8