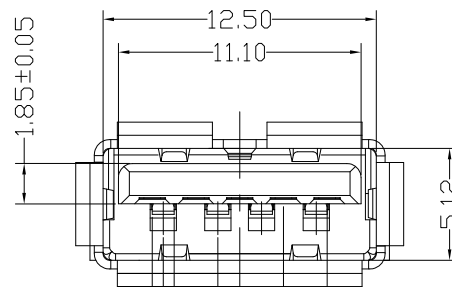
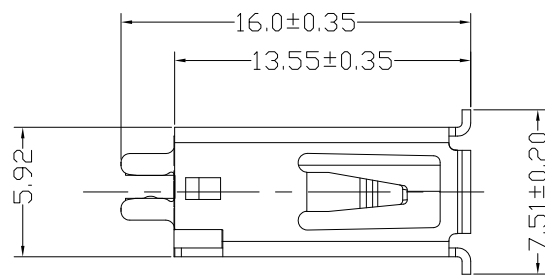


SECTION A-A



1.00±0.05(4X)  
 1.00±0.05(2X)  
 3.50±0.05(2X)  
 4.00±0.05(2X)  
 2.00±0.05(2X)

ELECTRICAL CHARACTERISTICS:  
 30V DC/AC 1A Max.  
 CONTACT RESISTANCE:30mΩ Max.  
 INSULATION RESISTANCE:  
 100MΩ Min.at 500V DC.  
 DIELECTRIC STRENGTH:  
 750V AC/1 minute.  
 INSERTION FORCE:3.6kgf MAX  
 WITHDRAWAL FORCE:1.0kgf MIN



BOM:

項次	名稱	料號	材質	電鍍或顏色	數量	備註
1	USB 3.0-A母頭(MOLD)-PIN A	DP0001002004-1XX	PHOSPHOR BRONZE T=0.25MM	SEE TABLE1	4	注塑
2	USB 3.0-A母頭(MOLD)-PIN B	DP0001002004-2XX	BRASS T=0.25MM	SEE TABLE1	5	注塑
3	USB 3.0-A母頭(MOLD)夾板式-上座	DP0001002012-3	High-temperature plastics	BLUE(PANTONE 300C)	1	注塑
4	USB 3.0-A母頭(MOLD)夾板式-下座	DP0001002012-4	High-temperature plastics	BLUE(PANTONE 300C)	1	注塑
5	USB 3.0-A母頭(MOLD)-外殼	DP0001002004-5	BRASS T=0.40MM	NICKEL PLATED	1	注塑

TABLE1:

XX	PLATED
11	G. F. /TIN PLATED前金後錫
12	3U"G. /TIN PLATED前金後錫
13	5U"G. /TIN PLATED前金後錫
14	10u"G. /TIN PLATED前金後錫
15	15U"G. /TIN PLATED前金後錫
16	20U"G. /TIN PLATED前金後錫
17	30U"G. /TIN PLATED前金後錫
18	50U"G. /TIN PLATED前金後錫

 **東莞世華電子有限公司**  
 SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)  
 地址:東莞市塘廈鎮諸佛嶺178工業區  
 TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY	張黎林	ITEM	USB 3.0-A母頭(MOLD)夾板式	ANGLE PROJECTION	UNIT	mm			
CHECKED BY		PART NO	DP0001002012-XX		SCALE	1:1		新訂圖面	08/31/2011
APPROVED BY		TOLERANCE		.X±0.2 .XX±0.10	DATE	08/31/2011	REVISION	DESCRIPTION	DATE