

1 2 3 4 5 6 7 8

A

B

C

D

E

F

A









B

C

D

E

F

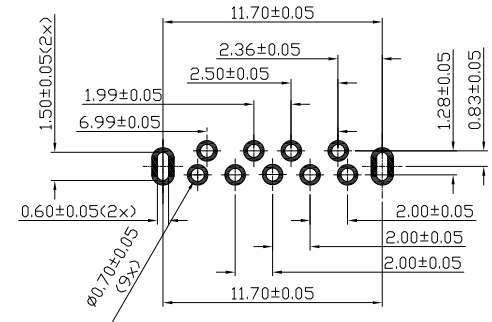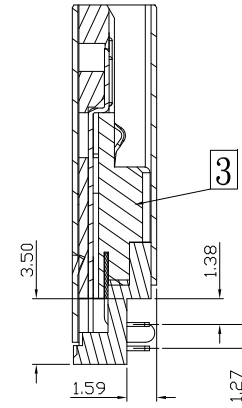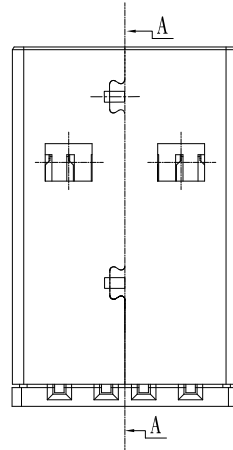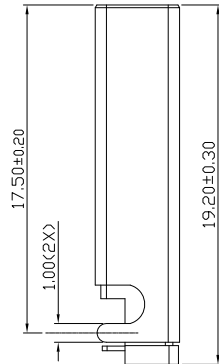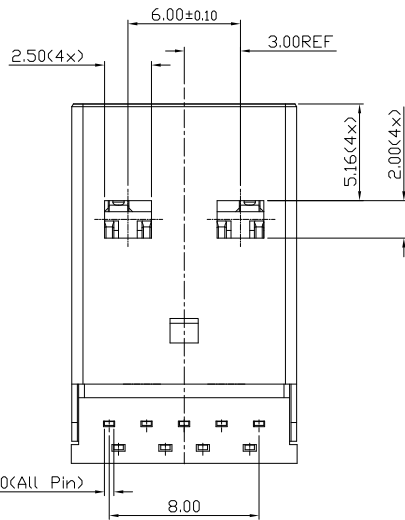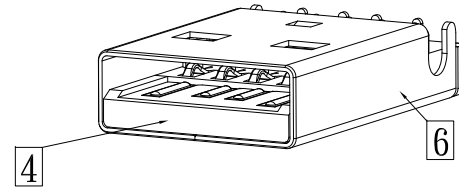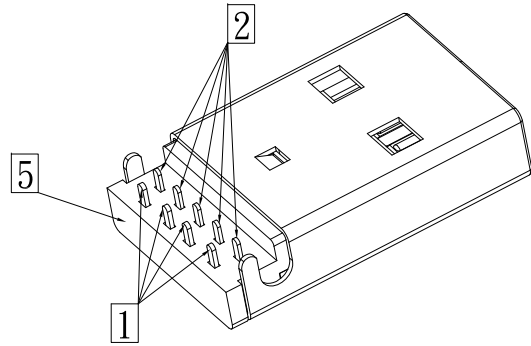

REFERENCE PCB LAYOUT

SECTION A-A

6	USB3.0-A公頭(DIP) 沉板式-外殼	DP0900007-6	1	SPCC T=0.30MM FINISH:NICKEL PLATED	
5	USB3.0-A公頭(DIP) 沉板式-塞墊	DP0900007-5	1	High temp.thermoplastic UL 94V-0 rated	
4		下座	DP0900007-4	1	High temp.thermoplastic UL 94V-0 rated
3		上座	DP0900007-3	1	High temp.thermoplastic UL 94V-0 rated
2	USB3.0-A公頭 (DIP)沉板式 -單件式	短端子	DP0900007-2XX	5	磷銅 T=0.20mm SEE TABLE-1
1		長端子	DP0900007-1XX	4	黃銅 T=0.25mm SEE TABLE-1
項次	品名	料號	數量	規格	備注

ELECTRICAL CHARACTERISTICS:
30V DC/AC 1A Max.
CONTACT RESISTANCE: 30mΩ Max.
INSULATION RESISTANCE:
100MΩ Min.at 500V DC.
DIELECTRIC STRENGTH:
750V AC/1 minute.
INSERTION FORCE:3.6kgf MAX
WITHDRAWAL:1.0kgf MIN

TABLE-1:

XX	電鍍	13	5u"前金后錫
00	鍍鎳	14	10u"前金后錫
01	鍍錫	15	15u"前金后錫
02	鍍銀	16	20u"前金后錫
03	鍍金	17	30u"前金后錫
11	前金后錫	18	50u"前金后錫
12	3u"前金后錫	20	70u"前金后錫

東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
地址:東莞市塘廈鎮諸佛嶺178工業區
TEL:0769-7910020-1 FAX:0769-7910210

DRAWN BY 周芯瑞
CHECKED BY
APPROVED BY

ITEM USB3.0-A公頭(DIP)
沉板式
PART NO DP0900007-XX TOLERANCE

ANGLE PROJECTION	UNIT	mm		
	SCALE	1:1		新訂圖面
.X±0.25 .XX±0.15	DATE	08/17/2009	REVISION	DESCRIPTION
				DATE

1 2 3 4 5 6 7 8