

A

B

C

D

E

F

A

B

C

D

E

F

1

2

3









4

5

6


7

8

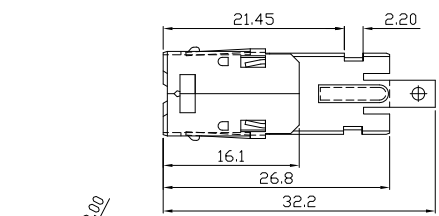



PR0166602

PR0168601




PR0320201


PR0320101




11.35±0.20




PR0320301






PR02400YY




PR0160001




MP04000XX

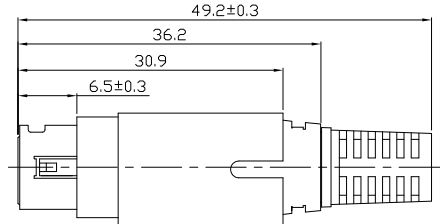

PR0100001



SPECIFICATIONS:
 1.Rating:PIN 1&2&3&4:DC 20V 7.5A Max or DC 30V 5A Max. $\triangle C_{61}$
 2.Contact Resistance:30mΩ Max.
 3.Insulation Resistance:DC 250V 50MΩ Min.
 4.Voltage Withstanding:AC 250V 1Minute.
 5.Applicable Wire Size:
 PIN 1&2&3&4:AWG #18 Max.

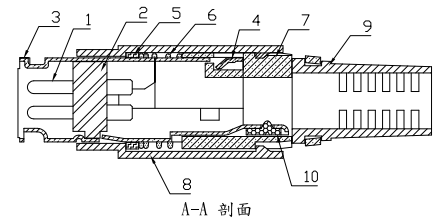

A-A 剖面

項次	名稱	料號	材質	電鍍或顏色	數量	備註
1	φ1.5*12.4L 成型PIN	PR00124XX	BRASS	SEE TABLE-1	4	
2	成型膠心		PBT+30%GF,UL 94 V-0	BLACK	1	
3	二組一細裝配銅管(下蓋)	PR0320201	BRASS,T=0.40±0.03MM	NICKEL PLATED	1	
4	二組一細裝配銅管(上蓋)	PR0320101	BRASS,T=0.40±0.03MM	NICKEL PLATED	1	
5	塑 鋼	PR0100001	塑膠鋼(POM M90#)	BLACK	1	
6	彈 簧	PR0160001	琴鋼線(SWP-A)線徑φ0.60±0.05	染黑	1	
7	內膠殼	PR0168601	PC,UL 94 V-0	SEE TABLE-2	1	
8	外 殼	PR02400YY	NYLON 66,UL 94 V-0	SEE TABLE-2	1	
9	SR 塑膠後套	PR0166602	PVC(3P 40P 45P 54P),UL 94 V-0	SEE TABLE-2	1	
10	線 扣	PR0320301	BRASS,T=0.80±0.05MM	TIN PLATED	1	

TABLE-2

TABLE-1

XX	PLATING	05	GOLD PLATED 5u" MIN.	YY	COLOR	06	COLOR
00	NICKEL PLATED.	06	GOLD PLATED 10u" MIN.	01		07	
01	TIN PLATED.	07	GOLD PLATED 15u" MIN.	02		08	
02	SLLVER PLATED.	08	GOLD PLATED 20u" MIN.	03		09	
03	GOLD FLASH PLATED.	09	GOLD PLATED 30u" MIN.	04		10	銀灰
04	GOLD PLATED 3u" MIN.	10	GOLD PLATED 50u" MIN.	05	黑	11	透明

東莞世華電子有限公司
 SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
 地址:東莞市塘廈鎮諸佛嶺178工業區
 TEL:0769-7910020-1 FAX:0769-7910210

DRAWN BY 丁麗
 CHECKED BY
 APPROVED BY

ITEM POWER SUPPLY STYLE ASSEMBLY
 四粗公頭(九件式 線徑φ6.6)
 PART NO PM44900XX-YY TOLERANCE

ANGLE PROJECTION UNIT MM
 SCALE 2:1
 DATE 08/07/2004 REVISION
 DESCRIPTION 工程變更
 DATE 08/07/2004

1

2

3

4

5

6

7

8