

A

B

C

D

E

F

A

B

C

D

E

F

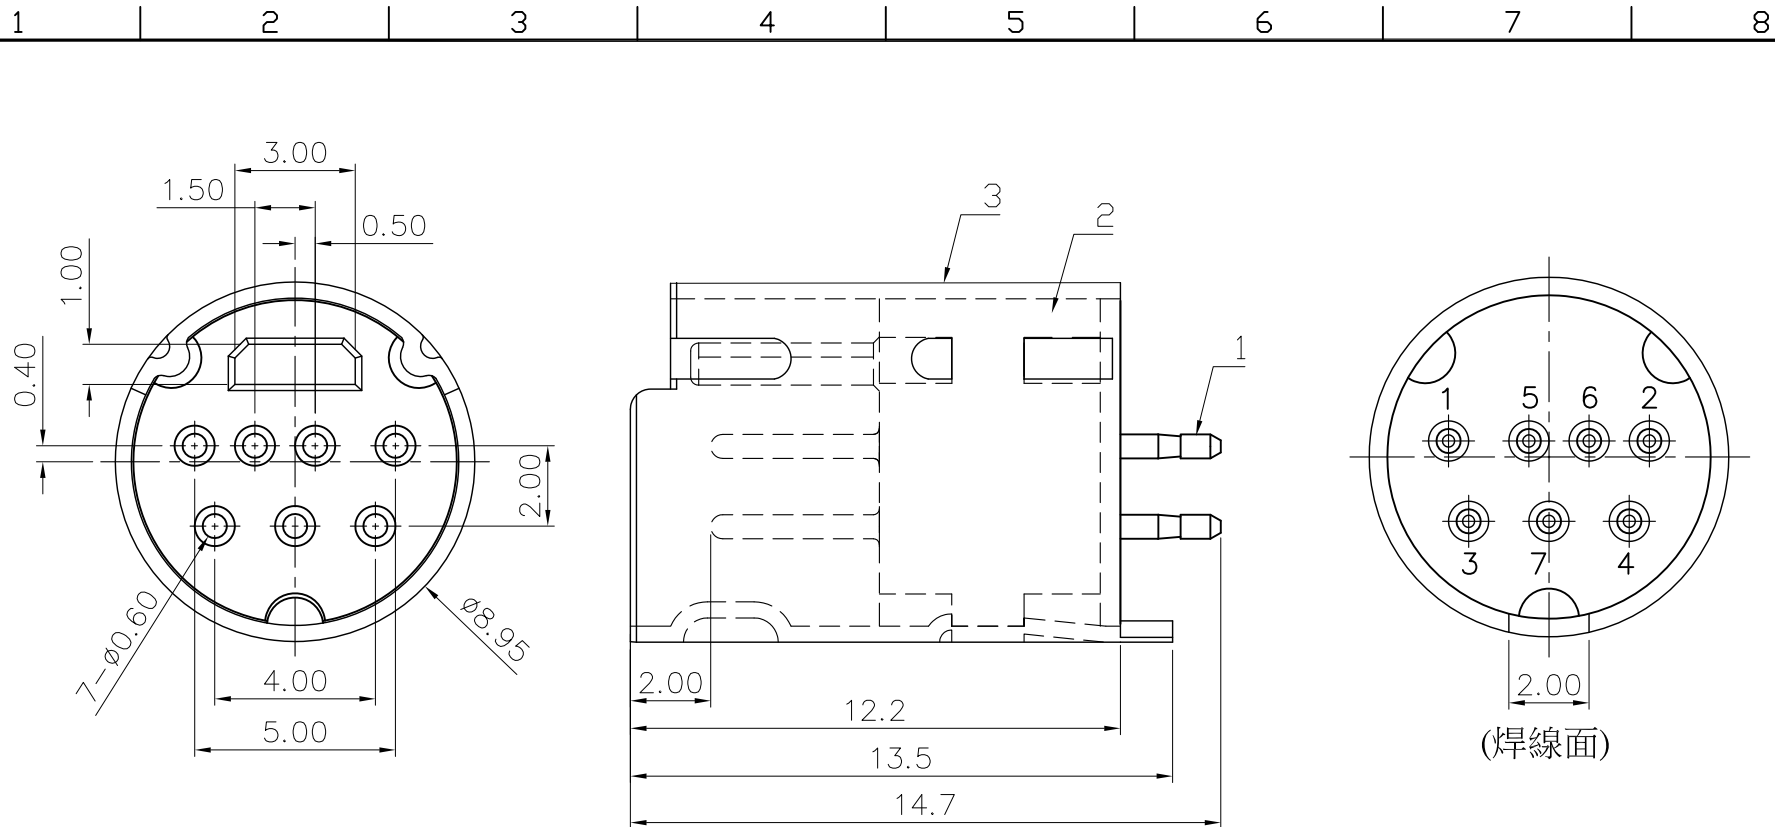


TABLE1:

XX	PLATING
01	NICKEL PLATED
03	GOLD FLASH PLATED

TABLE2:

XX	PLATING	05	GOLD PLATED 5u" MIN.
00	NICKEL PLATED	06	GOLD PLATED 10u" MIN.
01	TIN PLATED	07	GOLD PLATED 15u" MIN.
02	SILVER	08	GOLD PLATED 20u" MIN.
03	GOLD FLASH PLATED	09	GOLD PLATED 30u" MIN.
04	GOLD PLATED 3u"MIN	10	GOLD PLATED 50u" MIN.

BOM:

3	SHELL	1	BRASS,T=0.40±0.03MM. PLATING: SEE TABLE1	
2	INSULATOR	1	PBT+30%GF,UL 94 V-0	
1	PIN	7	BRASS PLATING: SEE TABLE2	
項次	名稱	數量	規格	備註

ELECTRICAL CHARACTERISTICS:  
RATING:100V AC 1A MAX or  
12V DC 2A MAX  
INSULATION RESISTANCE:  
50MΩ MIN at 250V DC  
DIELECTRIC STRENGTH:  
250V AC/1 minute

 東莞世華電子有限公司  
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)  
地址:東莞市塘廈鎮諸佛嶺178工業區  
TEL:0769-7910020-1 FAX:0769-7910210

DRAWN BY 豆秀品

CHECKED BY

APPROVED BY

ITEM


7P(AMP)成型公頭  
(銅管12.2L+片 PIN12.7L)

PART NO

HM07011XX-M

TOLERANCE

ANGLE PROJECTION



UNIT

SCALE

MM

5: 1

DATE

04/04/2004

REVISION



增加銅管電鍍表

DESCRIPTION

04/04/2004

DATE

1

2

3

4

5

6

7

8