

A

B

C

D

E

F

A


B

C

D

E

F

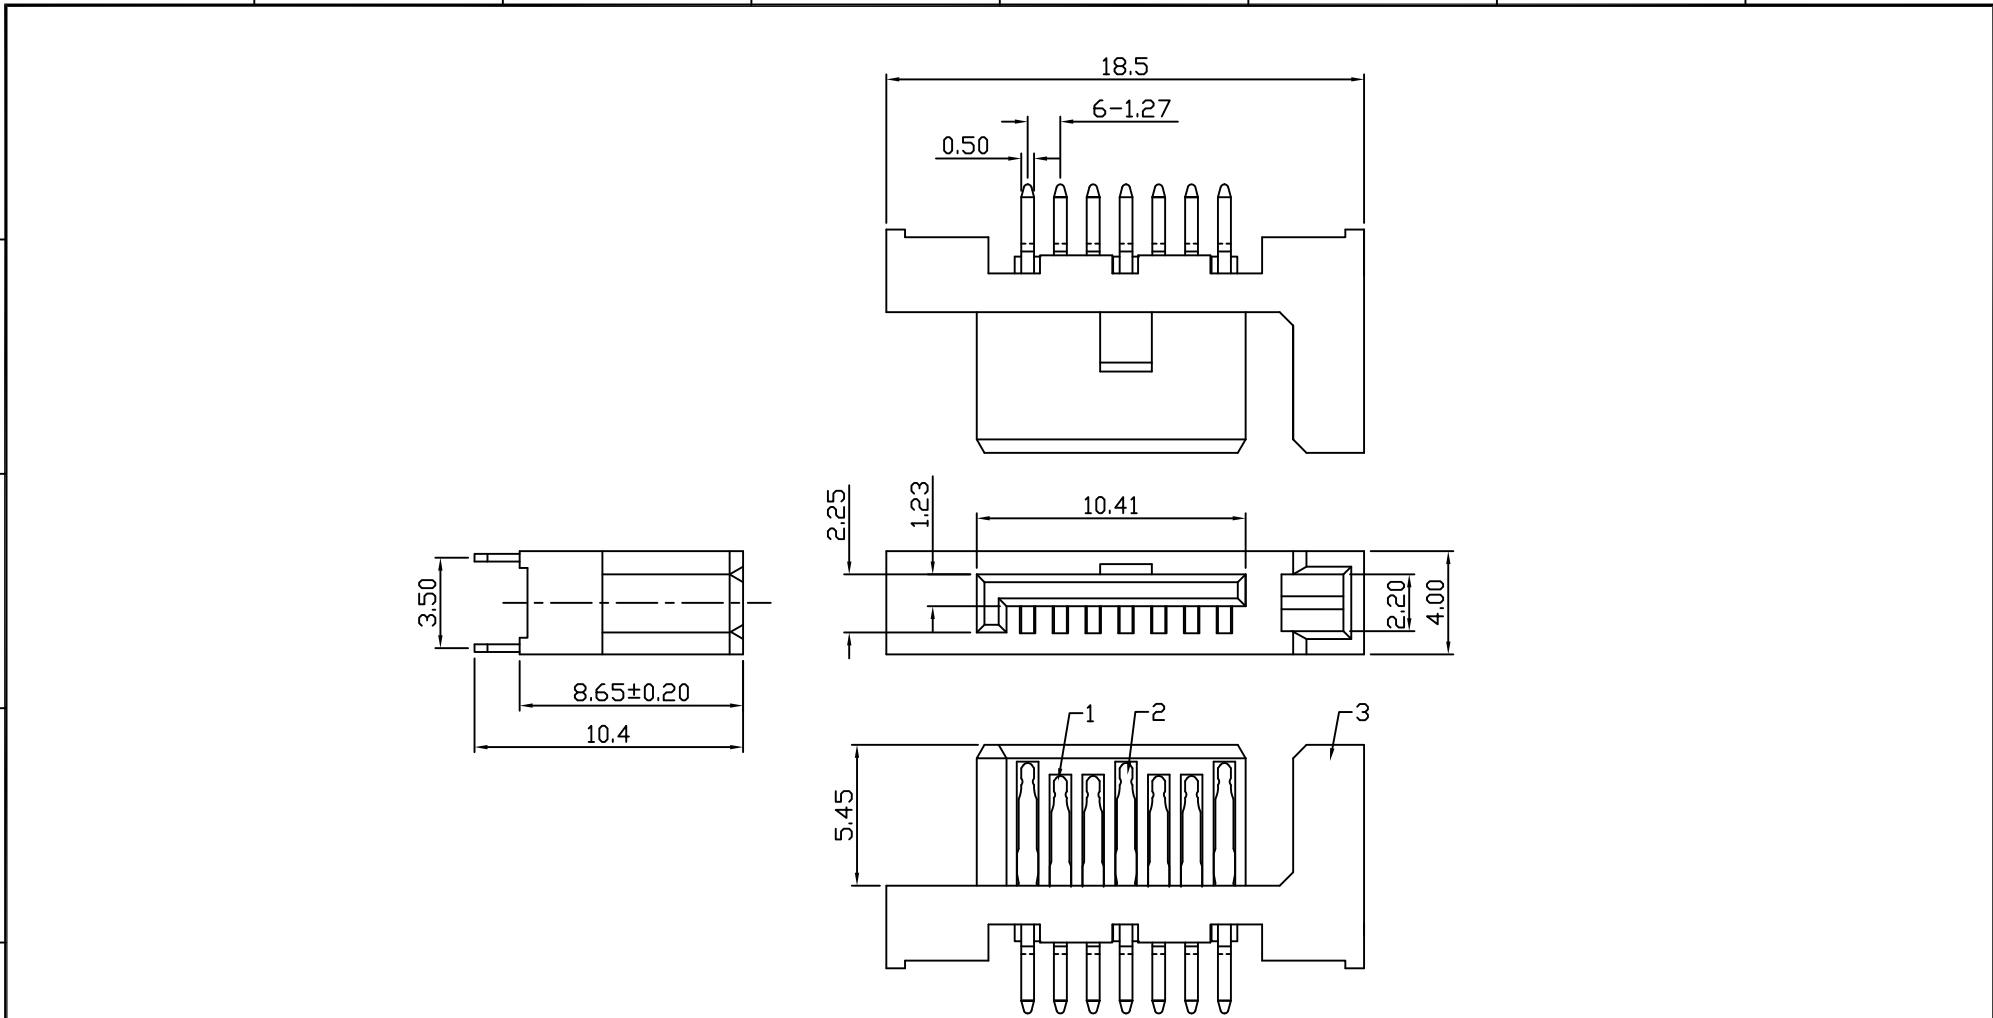



BOM:

3	膠心	LCP, UL 94 V-0		1	
2	PIN B	BRASS(H), T=0.30±0.03mm	15U" GOLD/TIN PLATED	3	
1	PIN A	BRASS(H), T=0.30±0.03mm	15U" GOLD/TIN PLATED	4	
項目	名稱	規格	電鍍	數量	備註

ELECTRICAL CHARACTERISTICS:
 CONTACT CURRENT RATING: 1 AMPERES.
 CONTACT RESISTANCE: 30mΩ Max.
 INSULATION RESISTANCE:
 500MΩ Min. at 500V DC.
 MECHANICAL CHARACTERISTICS
 CONTACT INSERTION FORCE: 4.5kgf MAX
 CONTACT WITHDRAWAL FORCE: 1.0~2.8kgf

 **東莞世華電子有限公司**
 SHYH HWA ELECTRONICS CO., LTD.(DONGGUAN)
 地址: 東莞市塘廈鎮諸佛嶺178工業區
 TEL: 0769-7910020-1 FAX: 0769-7910210

DRAWN BY	張敏華	ITEM	Serial ATA 連接器(7P)公頭		ANGLE PROJECTION	UNIT	MM			
CHECKED BY						SCALE	4:1		版本修訂, 舊圖作廢 06/27/2003	
APPROVED BY		PART NO	DPO700014	TOLERANCE	.XX±0.10 .X±0.2	DATE	06/27/2003	REVISION	DESCRIPTION	DATE

1

2

3

4

5

6

7

8