
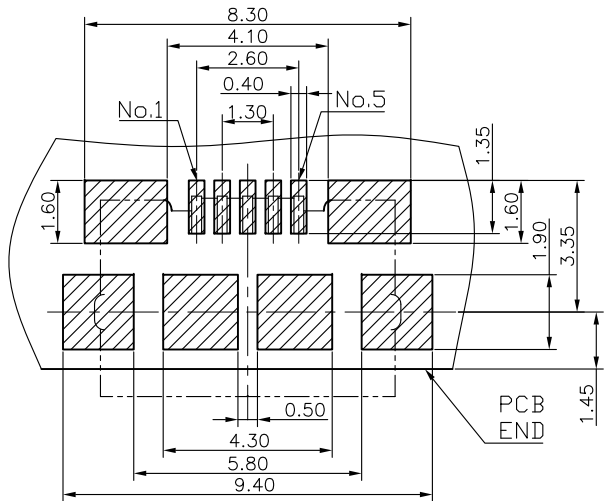
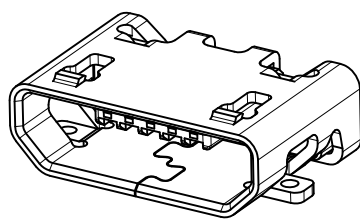






REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
△	新訂圖面	—	07/08/2015	唐忠洪

PICK&PLACE AREA

D/C(年/周/星期)

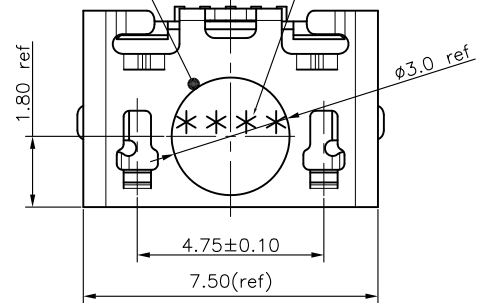

PCB LAYOUT
*General tolerance is ±0.05mm.

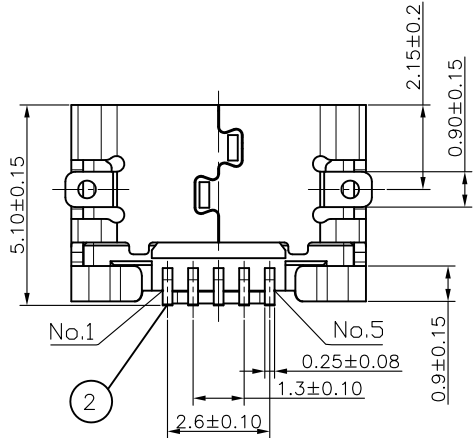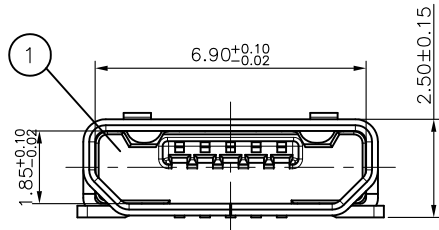

- NOTES:
- MATERIAL:
 - HOUSING:LCP(3040G/E6808/E6006);UL 94V-0, COLOR:BLACK
 - TERMINAL:BRASS(C2680-H);T=0.15±0.05mm TREATMENT:
 - GOLD FLASH ON CONTACT AREA,MATTE SN 50u" MIN ON SOLDER TAIL,ALL OVER NI 30u" MIN.
 - GOLD 30u" MIN ON CONTACT AREA,MATTE SN 50u" MIN ON SOLDER TAIL,ALL OVER NI 30u" MIN.
 - SHELL:SUS(304);T=0.30±0.05mm,TREATMENT:80u" TIN
 - SPECIFICATIONS:
 - CONTACT RESISTANCE:30mΩ MAX
 - INSULATION RESISTANCE:1000MΩ MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC 60HZ 1MINUTE.
 - MATING AND UNMATING FORCE: MATING FORCE:35N MAX/UNMATING FORCE:8N MIN.
 - DURABILITY:10000 CYCLES.

Part Number(客戶)
2UB1677-000111F

東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
地址: 東莞市塘廈鎮諸佛嶺178工業區
TEL: 0769-87910020-1 FAX: 0769-87910210

DRAWN BY	唐忠洪	ITEM	Micro usb 5P B type母座 有档位 SMT全貼无卷边	ANGLE PROJECTION	UNIT	mm	
CHECKED BY					SCALE	Fit	
APPROVED BY		PART NO	CD0001042004-WLE21	TOLERANCE	.X±0.20 .XX±0.10	DATE	07/08/2015