

A

B

C

D

E

E

F

1

2

3







4

5

6

7

8

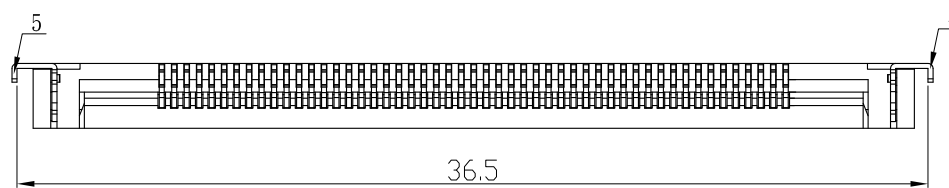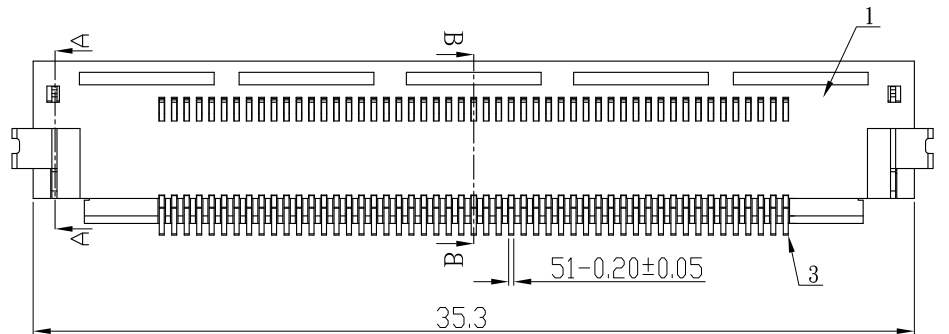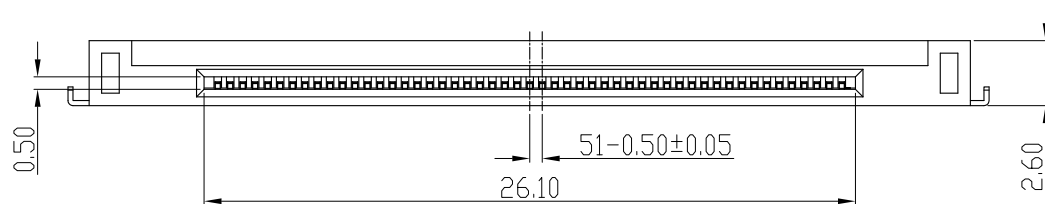

Build of material:

5	51P翻蓋式板端母頭-左彈片	1	DP051952001-5	BRASS (C2680-H) T=0.20±0.02mm	SEE TABLE	衝壓件
4	51P翻蓋式板端母頭-右彈片	1	DP051952001-4	BRASS (C2680-H) T=0.20±0.02mm	SEE TABLE	衝壓件
3	51P翻蓋式板端母頭-端子	51	DP051952001-3	PHOSPHOR BRONZE(C5210R-H) T=0.20±0.02mm	SEE TABLE	衝壓件
2	51P翻蓋式板端母頭-塞墊	1	DP051952001-2	PA9T+33%GF(DN2330) UL 94 V-0	BLACK	成型件
1	51P翻蓋式板端母頭-膠心	1	DP051952001-1	PA9T+33%GF(DN2330) UL 94 V-0	WHITE	成型件
項次	名稱	數量	料號	材質	電鍍(或顏色)	備註

SPECIFICATIONS:

1. ELECTRICAL:

1-1. INSULATION RESISTANCE:
100MΩ Min at 500V DC

1-2. CONTACT RESISTANCE: 40mΩ Max.

1-3. DIELECTRIC WITHSTANDING VOLTAGE:
500V AC/2 Second.

2. ENVIRONMENTAL:

OPERATING TEMPERATURE: -25°C TO +55°C.

NOETS:

1. 端子與彈片不可下斜(上翹不可超過0.07mm);
2. 貼板面平整度需在0.07mm內.

TABLE:

XX	PLATING	05	GOLD PLATED 5u" MIN.
00	NICKEL PLATED.(吃錫鍍)	06	GOLD PLATED 10u" MIN.
01	TIN PLATED.	07	GOLD PLATED 15u" MIN.
02	SILVER PLATED.	08	GOLD PLATED 20u" MIN.
03	GOLD FLASH PLATED.	09	GOLD PLATED 30u" MIN.
04	GOLD PLATED 3u" MIN.	10	GOLD PLATED 50u" MIN.

 東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
地址:東莞市塘廈鎮諸佛嶺178工業區
TEL:0769-7910020-1 FAX:0769-7910210

DRAWN BY

許華

CHECKED BY

APPROVED BY

ITEM

51P翻蓋式板端母頭


PART NO

DP051952001

TOLERANCE

 $\begin{matrix} X \pm 0.2 \\ .XX \pm 0.10 \end{matrix}$

ANGLE PROJECTION



UNIT

mm

SCALE

2.5:1

DATE

10/09/2006

REVISION



新訂圖面

DESCRIPTION

10/09/2006

DATE

1

2

3

4

5

6

7

8