



DP041952002-4

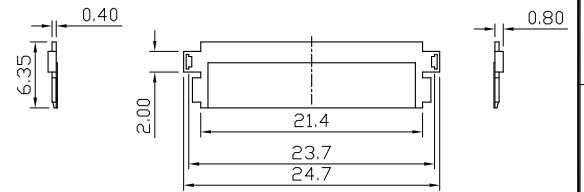

DP041952002-2

Build of material:

項次	名稱	數量	料號	材質	電鍍(或顏色)	備註
6	51P 翻蓋式線端公頭-端子	41	DP051952002-2	PHOSPHOR BRONZE(C5191R-H) T=0.15±0.02mm	15u"金/一般金	衝壓件 (共用)
5	41P線端公頭-下蓋	1	DP041952002-4	SUS(301), 1/2H T=0.20±0.02mm		衝壓件
4	41P線端公頭-上蓋	1	DP041952002-3	SUS(301), 1/2H T=0.20±0.02mm		衝壓件
3	51P 翻蓋式線端公頭-彈片	2	DP051952002-3	SUS(301), T=0.30±0.02mm		衝壓件 (共用)
2	41P線端公頭-塞墊	1	DP041952002-2	LCP, UL 94 V-0	BLACK	成型件
1	41P線端公頭-膠心	1	DP041952002-1	LCP, UL 94 V-0	BLACK	成型件

SPECIFICATIONS:

- ELECTRICAL:
 - INSULATION RESISTANCE: 100MΩmin at 500V DC
 - CONTACT RESISTANCE: 40mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/2 Second.
- ENVIRONMENTAL:
 - OPERATING TEMPERATURE: -25°C TO +55°C.

東莞世華電子有限公司
 SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
 地址: 東莞市塘廈鎮諸佛嶺178工業區
 TEL:0769-7910020-1 FAX:0769-7910210

DRAWN BY **黃芳**
 CHECKED BY
 APPROVED BY

ITEM **41P線端公頭**
 PART NO **DP041952002**
 TOLERANCE .X±0.2
 .XX±0.10

ANGLE PROJECTION

 UNIT mm
 SCALE 2:1
 DATE 04/09/2007
 REVISION
設計變更
 DESCRIPTION
 DATE 04/09/2007