
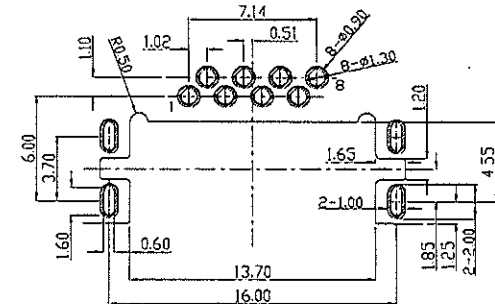
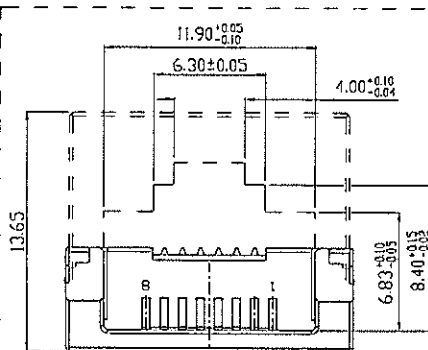
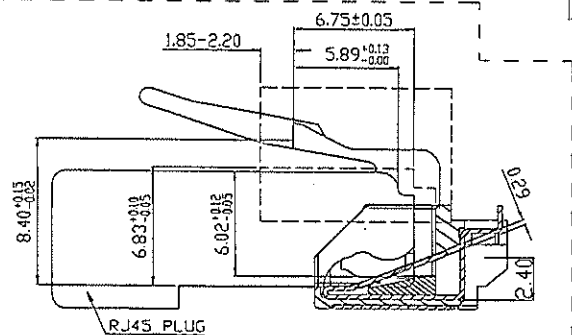
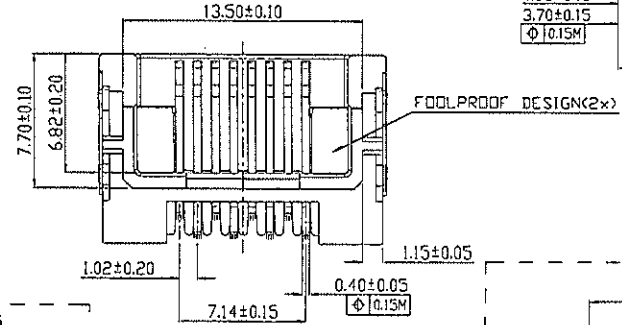
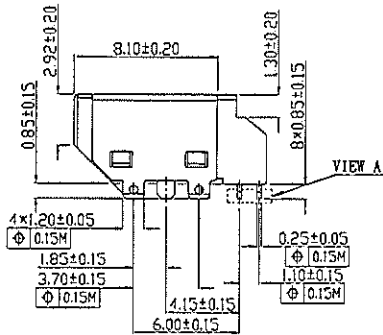
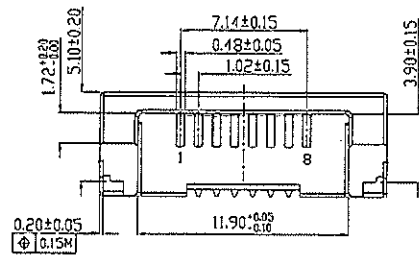




RoHS
Compliant

Halogen Free

REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
△	新訂圖面	—	10/10/2020	胡久量

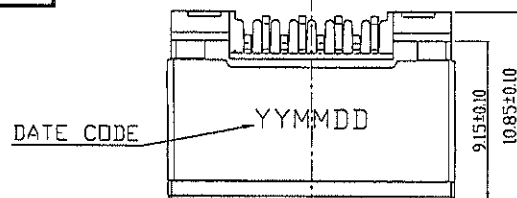

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm



VIEW A SCALE 5:1

Part Number(客戶)	AU
2RJ1660-003211F	30u"

- NOTES:
- 1.MATERIAL:
1-1:HOUSING:PA10T+35%GF(VICNYL R635NH);UL 94V-0, COLOR:BLACK
1-2:TERMINAL:PHOSPHOR BRONZE(C5210R-EH);T=0.25mm TREATMENT:
1.GOLD 30u" MIN ON CONTACT AREA,MATTE SN 80u" MIN ON SOLDER TAIL,ALL OVER NI 30u" MIN.
1-3:SHELL:SUS(201);T=0.20mm,TREATMENT:50u" NI MIN.
1-4:DEFEND:PC(E1301);UL 94V-0, COLOR:BLACK
 - 2.SPECIFICATIONS:
2-1.VOLTAGE RATING:150VAC MAX.
2-2.CURRENT RATING:1.5AMP MAX.
2-3.INSULATION RESISTANCE:1000MΩ MIN. AT 500V DC.
2-4.DIELECTRIC WITHSTANDING VOLTAGE:
1000V AC 60HZ 1MINUTE.
2-5.DURABILITY:5000 CYCLES.
2-6.OPERATING TEMPERATURE:-30°C TO+70°C.
2-7.FOR REFLOW SOLDERING LEAD-FREE PROCESS.



東莞世華電子有限公司

SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)

地址:東莞市塘廈鎮諸佛嶺178工業區

TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY	胡久量	ITEM
CHECKED BY		
APPROVED BY		PART NO

半截式 RJ45 8P8C (板上5.1mm)

CD4531092004

ANGLE PROJECTION	UNIT	mm
SCALE	1:1	
TOLERANCE	.X±0.20 .XX±0.10	DATE