
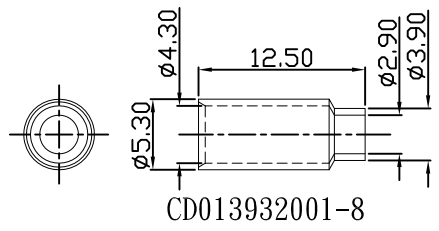


A-A部剖視圖  
CD013932001-9



CD013932001-5

CD013932001-6

Build of material:

| 項次 | 名稱  | 料號   | 數量            | 材質            | 電鍍或顏色                      | 版本                         | 備註 |            |
|----|---|--|---------------|---------------|----------------------------|----------------------------|----|------------|
| 5  | TNC Jack PCB MOUNT CRIMP 180<br>-后套(100-2003005-AE)   | CD013932001-8  | 1             | BRASS<br>(鉚料) | 80u"-120u"<br>NICKE PLATED | A2                         | 車件 |            |
| 4  | TNC Jack PCB MOUNT CRIMP 180<br>-絕緣墊片(100-2003005-AD) | CD013932001-7  | 1             | TEFLON        | WHITE                      | A2                         | 車件 |            |
| 3  | TNC Jack PCB MOUNT CRIMP 180<br>-后蓋(100-2003005-AC)   | CD013932001-6  | 1             | 快削銅           | 80u"-120u"<br>NICKE PLATED | A2                         | 車件 |            |
| 2  | TNC Jack PCB MOUNT CRIMP 180<br>-PIN (100-2003005-AB) | CD013932001-5  | 1             | 快削銅           | 3u" GOLD PLATED            | A2                         | 車件 |            |
| 組件 | E   | TNC Jack Reverse Straight<br>For 2.9-整圈              | CD013932008-3 | 1             | 快削銅                        | 80u"-120u"<br>NICKE PLATED | A2 | 車件<br>(共用) |
|    | D   | TNC Jack PCB MOUNT CRIMP 180<br>(100-2003005-AA)-銅殼  | CD013932001-4 | 1             | 快削銅                        | 80u"-120u"<br>NICKE PLATED | A2 | 車件         |
|    | C   | TNC Jack PCB MOUNT CRIMP 180<br>(100-2003005-AA)-轉接頭 | CD013932001-3 | 1             | 快削銅                        | 80u"-120u"<br>吃錫鍍          | A2 | 車件         |
|    | B   | TNC Jack PCB MOUNT CRIMP 180<br>(100-2003005-AA)-膠心  | CD013932001-2 | 1             | TEFLON                     | WHITE                      | A2 | 車件         |
|    | A   | TNC Jack PCB MOUNT CRIMP 180<br>(100-2003005-AA)-本體  | CD013932001-1 | 1             | 快削銅                        | 80u"-120u"<br>NICKE PLATED | A2 | 車件         |

NOTES:

1. Break All Connors And Edges C0.15 MAX;
2. Diameter On Common Center And TO Be Concentric Within 0.1mm;
3. The Component is for RG-316 COXial Cable.

**東莞世華電子有限公司**  
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)  
地址:東莞市塘廈鎮諸佛嶺178工業區  
TEL:0769-7910020-1 FAX:0769-7910210

|             |    |           |  |                  |            |          |             |      |            |
|-------------|----|-----------|--|------------------|------------|----------|-------------|------|------------|
| DRAWN BY    | 許華 | ITEM      | TNC Jack PCB MOUNT CRIMP 180<br>(100-2003005-AZ) | ANGLE PROJECTION | UNIT       | MM       |             |      |            |
| CHECKED BY  |    | PART NO   | CD013932001                                      |                  | SCALE      | 2:1      | A2          | 統一版本 | 11/04/2004 |
| APPROVED BY |    | TOLERANCE | .X±0.2<br>.XX±0.10                               | DATE             | 11/04/2004 | REVISION | DESCRIPTION | DATE |            |