



A-A' 剖視圖

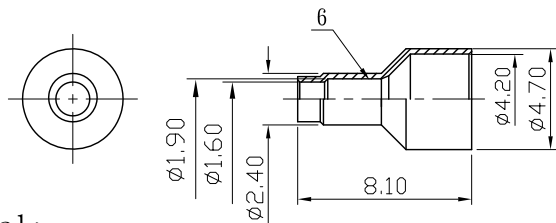


此牙根徑尺寸僅供參考，  
只確保與螺母對鎖順暢，  
扭力  $\ge 15\text{Kgf}\cdot\text{cm}$

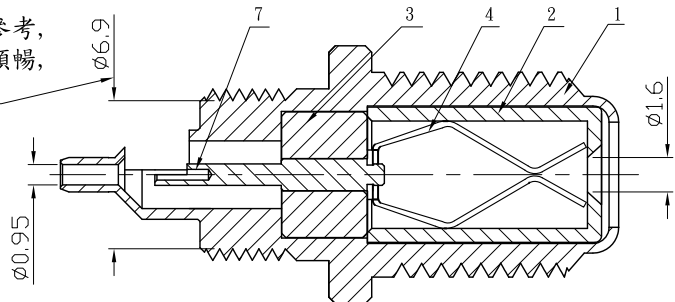

A-A' 剖視圖

TYPE F PLUG ST-組件



CABLE STRIPPING DIM.

Build of material:

8	TYPE F PLUG ST-后套	CD015962008-8	1	快削銅 80-120u" NICKEL PLATED	車件
7	TYPE F PLUG ST-中心針	CD015962008-7	1	快削銅 3u" GOLD PLATED	車件
6	TYPE F PLUG ST-墊圈	CD015962008-6	1	鐵料 T=0.50±0.02mm FINISH: 80-120u" 鍍	沖壓
5	TYPE F PLUG ST-螺母	CD015962008-5	1	快削銅 80-120u" NICKEL PLATED	車件
4	TYPE F PLUG ST-彈片	CD015962008-4	1	磷銅(EH), T=0.25±0.02mm 80-120u" 錫.	沖壓
3	TYPE F PLUG ST-膠心(2)	CD015962008-3	1	TEFLON, WHITE	車件
2	TYPE F PLUG ST-膠心(1)	CD015962008-2	1	POM, WHITE	車件
1	TYPE F PLUG ST-本体	CD015962008-1	1	快削銅 80-120u" NICKEL PLATED	車件
項次	名稱	料號	數量	規格	備註

**東莞世華電子有限公司**  
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)  
地址: 東莞市塘廈鎮諸佛嶺178工業區  
TEL: 0769-7910020-1 FAX: 0769-7910210

DRAWN BY 胡久量  
CHECKED BY  
APPROVED BY

ITEM TYPE F PLUG ST  
PART NO CD015962008  
TOLERANCE .X±0.2  
.XX±0.10

ANGLE PROJECTION UNIT MM  
SCALE 4:1  
DATE 03/11/2008  
REVISION  
DESCRIPTION 工程變更 舊圖作廢  
DATE 03/11/2008